


Pull Handles

Round Series




66 6506 

66 6506 065 (RH)
66 6506 075 (LH)

Handle cross-section \varnothing 35 mm
Safety clearance $S = 47$ mm
Fastening M8

Illustration: right hand, outside view

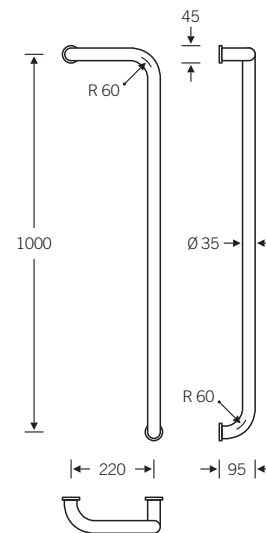

All details subject to modification

Fastening Methods (Details on page 68/69)

- A** Back-to-Back
- B** Through-Bolted
- C** Concealed - Threaded Insert
- D** Concealed - Drop Clamp